HUMMINBIRD®

INSTALLATION DIAGRAMS

Minn Kota Trolling Motor with i-Pilot Link and (1) console-mounted Humminbird unit

3

MK Heading Sensor

Trolling Motor Batteries

CONSOLE UNIT

Graph

1

2

4

5

Cranking Battery

Transducer supplied with MEGA Side Imaging unit at console
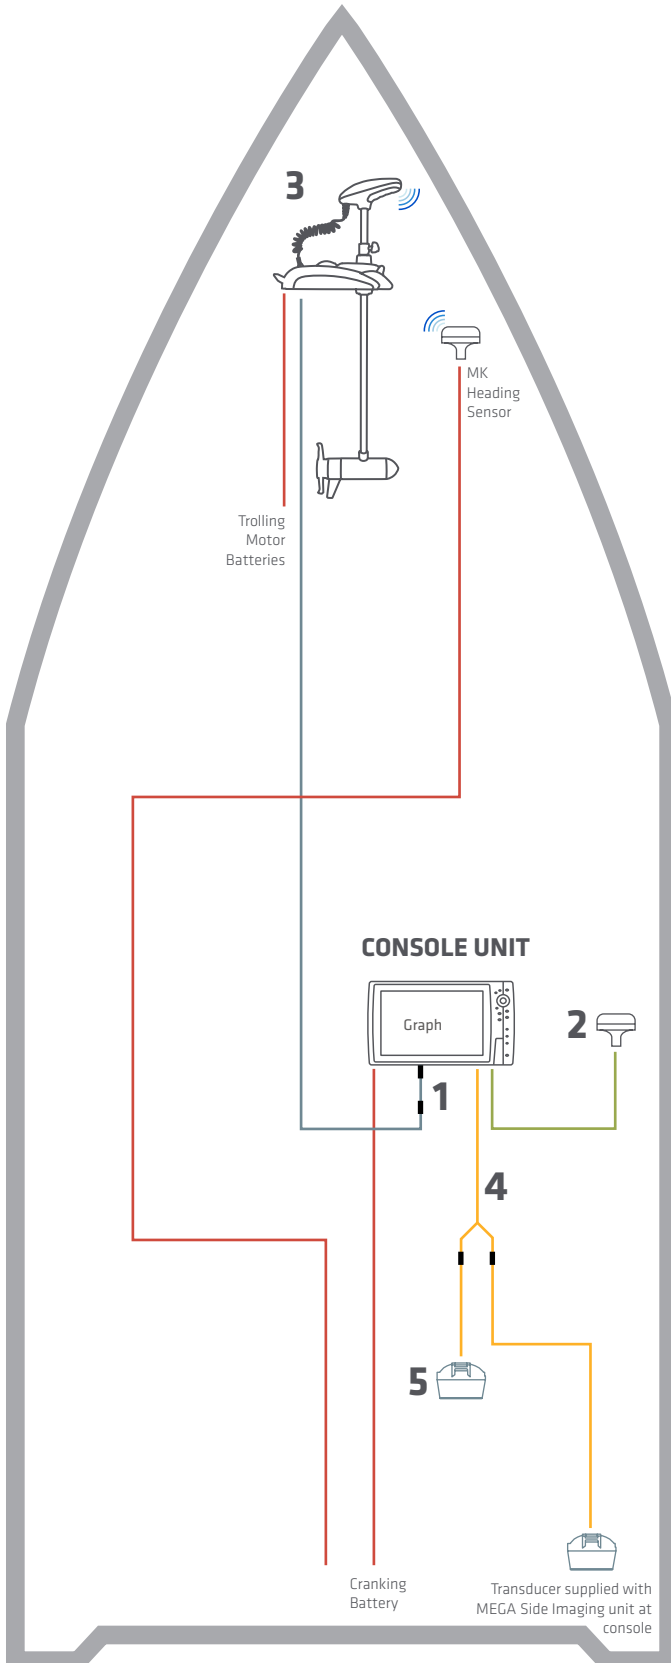
Compatible Accessories				
	HELIX Series		**SOLIX Series**	
1	Ethernet Adapter Cable		Ethernet Adapter Cable	
	720074-1	AS EC QDE	NA	
2	GPS + Heading Sensor		GPS + Heading Sensor	
	408400-1	AS GPS HS	408400-1	AS GPS HS
			720080-1	AS GPS NMEA
3	Minn Kota Trolling Motor with i-Pilot Link *		Minn Kota Trolling Motor with i-Pilot Link *	
4	Transducer Splitter Cable		Transducer Splitter Cable	
	720101-1	9 M SIDB Y	720103-1	14 M SIDB Y
5	High Speed Transducer (fiberglass hull)		High Speed Transducer (fiberglass hull)	
	710276-1	XP 9 HW T	710287-1	XP 14 HW T
	High Speed Transducer (aluminum hull)		High Speed Transducer (aluminum hull)	
	710274-1	XNT 9 HW T	710285-1	XNT 14 HW T

NMEA 0183   Ethernet   12V DC Power   Transducer Cable   *Bluetooth*® Signal

* One (1) AS ECX 30E Ethernet Extension cable included with i-Pilot Link trolling motor

The accessories and part numbers listed are valid as of April 2020. Installations shown are for HELIX G3N and SOLIX G2 networking models and Minn Kota trolling motors with i-Pilot Link.